

PRODUCT DESCRIPTION




APPLICATION: General-purpose areas, with no specific risks
Public areas, corridors
Suspended luminaire
Ceiling surface-mounted luminaire.
Wall surface-mounted luminaire.

MATERIALS EXECUTION: Soft steel sheet body, with anti-corrosion treatment.
White coated body. UV protected.
Luminaire with tempered glass

1 Frosted glass with transparent edge

MAINS SUPPLY AND WIRING Voltage and frequency supply of the luminaire (230V at 50Hz).
Electrified lamp with electronic ballast (power supply AC OR DC).

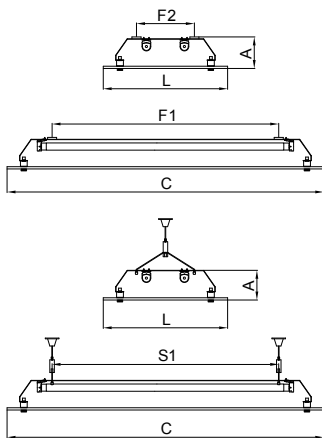

ACCESSORIES

OPTIONS

TECHNICAL DATA


	Luminous Flux (Lm)	Nº Lamp. x Power (W)	Luminous Efficacy (lm/W)	LED Risk Group	Colour Temp. (K)	UGR		Dimensions (mm)				
						(X= 4H; Y= 8H; S= 0,25H)		Length	Width	Height	Fixation	Fixation
						Tran.	Long.					
AV 01 254 BE	n/a	108,00	n/a	n/a	n/a	21.1	20.2	1300	275	61	1090	128

OTHER TECHNICAL INFORMATION


CRI: >

Photometric Code:

POLAR DIAGRAM



ENERGY LABEL

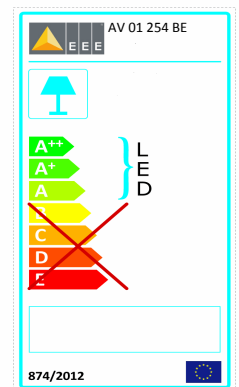

NORMS