

PRODUCT DESCRIPTION

APPLICATION: Offices, meeting rooms
Shops, commercial areas.
General-purpose areas, with no specific risks
Suspended luminaire
Ceiling surface-mounted luminaire.



MATERIALS EXECUTION: Soft steel sheet body, with anti-corrosion treatment.
White coated body. UV protected.
Die-cast aluminum end-caps.
Semi Opal flat diffuser in PMMA

MAINS SUPPLY AND WIRING: Voltage and frequency supply of the luminaire (230V at 50Hz).
Electrified lamp with electronic ballast (power supply AC OR DC).

ACCESSORIES

Aluminium-grey coated body UV protected.

OPTIONS



TECHNICAL DATA

	Luminous Flux (Lm)	Nº Lamp. x Power (W)	Luminous Efficacy (lm/W)	LED Risk Group	Colour Temp. (K)	UGR		Dimensions (mm)				
						(X= 4H; Y= 8H; S= 0,25H)		Length	Width	Height	Fixation	Fixation
						Tran.	Long.	C	L	A	F1	F2
CMI 02 235 BE	n/a	70,00	n/a	n/a	n/a	21.3	21.9	1550	203	53	1270	125


OTHER TECHNICAL INFORMATION

CRI: > 80


Photometric Code: 840

Rendimento: 68,5%

POLAR DIAGRAM



ENERGY LABEL

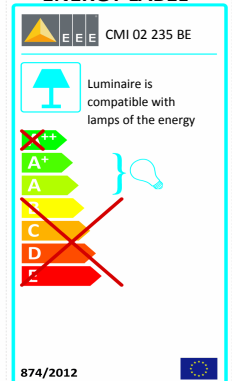

NORMS

EN 60598-1, EN 55015, EN 61000-3-2, EN 61547, 2011/65/CE (Rohs), 2014/30/EU, 2014/35/EU, 2011/65/EU (Rohs), (EU) N° 1194/2012 (Ecodesign), EN 60598-2-1