






# Technical Data Sheet

## CRLC 03 15034-O7 DE 7500lm



### PRODUCT DESCRIPTION

**APPLICATION:** Offices, meeting rooms  
Shops, commercial areas.  
General-purpose areas, with no specific risks  
Ceiling surface-mounted luminaire.

**MATERIALS EXECUTION:** Soft steel sheet body, with anti-corrosion treatment.  
White coated body. UV protected.  
Parabolic reflectors anodized matte aluminum high yield, with high coefficient of reflection and without iridescence

**MAINS SUPPLY AND WIRING:** Voltage and frequency supply of the luminaire (230V at 50Hz).  
Luminaire wired with electronic driver.  
Luminaire suitable for looping-in connection.

### ACCESSORIES

**OPTIONS:** Luminaire wired with electronic ballast for dimming, Luminaire wired with electronic driver for dimming, Luminaire equipped with emergency kit 1H.

### TECHNICAL DATA

	Luminous Flux (Lm)	System Power (W)	Luminous Efficacy (lm/W)	LED Risk Group	Colour Temp. (K)	UGR		Dimensions (mm)				
						(X= 4H; Y= 8H; S= 0,25H)		Length	Width	Height	Fixation	Fixation
						Tran.	Long.					
CRLC 03 15034-O7 DE 7500lm	4583	50,6	91	1	4000	15.8	18.0	1495	295	55	240	1200


### OTHER TECHNICAL INFORMATION

CRI: > 80


Photometric Code: 840/349

Lifetime Factor (L80B10) @ Ta=25°C: 50.000 h

### POLAR DIAGRAM



### ENERGY LABEL

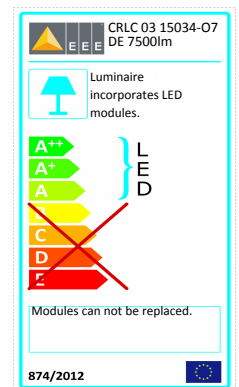

### NORMS

EN 60598-1, EN 55015, EN 61000-3-2, EN 61547, 2014/30/EU, 2014/35/EU, 2011/65/EU (Rohs), (EU) N° 1194/2012 (Ecodesign), EN 60598-2-1