

PRODUCT DESCRIPTION

APPLICATION: Offices, meeting rooms
Shops, commercial areas.
Supermarkets
General-purpose areas, with no specific risks
Schools, class rooms
Shop windows, vertical panels
Ceiling surface-mounted luminaire.
Luminaire for continuous line

MATERIALS Soft steel sheet body, with anti-corrosion treatment.
EXECUTION: White coated body. UV protected.
Parabolic reflectors anodized aluminum semispecular high yield, with high coefficient of reflection and without iridescence

MAINS SUPPLY AND WIRING Voltage and frequency supply of the luminaire (230V at 50Hz).
5 modules electrified conductors 1.5 mm² and 7 quick-connect terminals.
Luminaire wired with electronic driver.

ACCESSORIES

OPTIONS Luminaire wired with electronic driver for dimming, Luminaire equipped with emergency kit 1H, Aluminium-grey coated body UV protected.

TECHNICAL DATA

	Luminous Flux (Lm)	System Power (W)	Luminous Efficacy (lm/W)	LED Risk Group	Colour Temp. (K)	UGR		Dimensions (mm)				
						(X= 4H; Y= 8H; S= 0,25H)		Length	Width	Height	Fixation	Fixation
						Tran.	Long.					
CTLX 01 13034-O7 DE 3000lm	2478	20,24	122	1	4000	15.5	16.5	1250	203	82	1070	95


OTHER TECHNICAL INFORMATION

CRI: > 80


Photometric Code: 840/349

Lifetime Factor (L80B10) @ Ta=25°C: 50.000 h

POLAR DIAGRAM



ENERGY LABEL

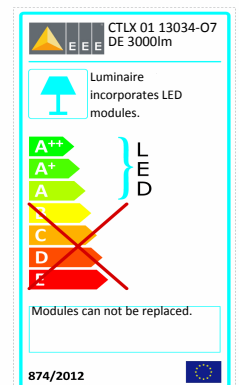

NORMS

EN 60598-1, EN 62031, EN 55015, EN 61000-3-2, EN 61547, 2011/65/CE (Rohs), 2014/30/EU, 2014/35/EU, 2011/65/EU (Rohs), (EU) N° 1194/2012 (Ecodesign), EN 60598-2-1