



# Technical Data Sheet

## DRLF100 01 02024-B1 DE 2100lm RALT 9016



### PRODUCT DESCRIPTION


**APPLICATION:** Offices, meeting rooms  
Shops, commercial areas.  
General-purpose areas, with no specific risks  
Public areas, corridors  
Seminar rooms, conference rooms.

**MATERIALS EXECUTION:** Injected aluminium body.  
White coated frame. UV protected.  
White coated (RAL9016) aluminium reflector

**MAINS SUPPLY AND WIRING:** Voltage and frequency supply of the luminaire (230V at 50Hz).  
Luminaire wired with electronic driver.

**ACCESSORIES:** Retro fit kit nº4, Retro fit kit nº5.

### OPTIONS



### TECHNICAL DATA

	Luminous Flux (Lm)	System Power (W)	Luminous Efficacy (lm/W)	LED Risk Group	Colour Temp. (K)	UGR		Dimensions (mm)				
						(X= 4H; Y= 8H; S= 0,25H)		Diameter	Width	Height	Fixation	Recessed
						Tran.	Long.	DIA	L	A	F1	E
DRLF100 01 02024-B1 DE 2100lm	1999	22,7	88	n/a	4000	25.7	25.7	166	n/a	86	n/a	138


### OTHER TECHNICAL INFORMATION

CRI: > 80


Photometric Code: 840/459

Lifetime Factor (L70B50) @ Ta=25°C: 30.000 h

### POLAR DIAGRAM



### ENERGY LABEL

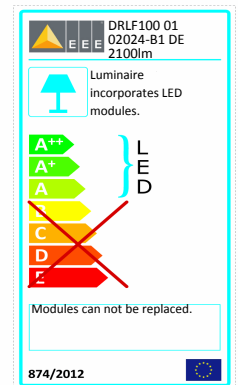

### NORMS

EN 60598-1, EN 55015, EN 61000-3-2, EN 61547, EN 60598-2-2, 2014/30/EU, 2014/35/EU, 2011/65/EU (Rohs), (EU) Nº 1194/2012 (Ecodesign)