




Technical Data Sheet

DRLMV101 01 02024-B1 DE 2100lm RALT 9016

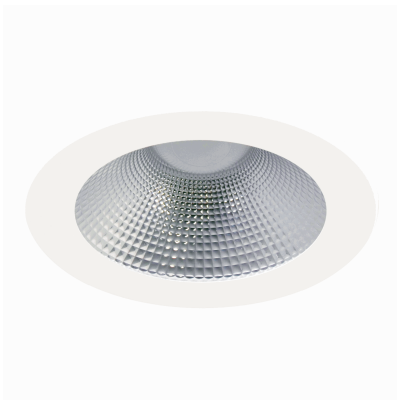

PRODUCT DESCRIPTION

APPLICATION: Offices, meeting rooms
Shops, commercial areas.
General-purpose areas, with no specific risks
Public areas, corridors
Seminar rooms, conference rooms.

MATERIALS EXECUTION: Injected aluminium body.
White coated frame. UV protected.
White coated (RAL9016) aluminium reflector


Flat transparent glass
Voltage and frequency supply of the luminaire (230V at 50Hz).
Luminaire wired with electronic driver.

MAINS SUPPLY AND WIRING

Retro fit kit n°4, Retro fit kit n°5.

ACCESSORIES

OPTIONS



TECHNICAL DATA

	Luminous Flux (Lm)	System Power (W)	Luminous Efficacy (lm/W)	LED Risk Group	Colour Temp. (K)	UGR		Dimensions (mm)				
						(X= 4H; Y= 8H; S= 0,25H)		Diameter	Width	Height	Fixation	Recessed
						Tran.	Long.					
DRLMV101 01 02024-B1 DE 2100lm	1796	22,7	79	n/a	4000	23.4	23.4	166	n/a	86	n/a	138


OTHER TECHNICAL INFORMATION

CRI: > 80


Photometric Code: 840/459

Lifetime Factor (L70B50) @ Ta=25°C: 30.000 h

POLAR DIAGRAM



ENERGY LABEL

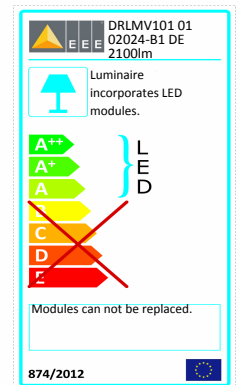

NORMS

EN 60598-1, EN 55015, EN 61000-3-2, EN 61547, EN 60598-2-2, 2014/30/EU, 2014/35/EU, 2011/65/EU (Rohs), (EU) N° 1194/2012 (Ecodesign)