



Technical Data Sheet

EUROLEDD 02 06064-07 DE 3000lm





PRODUCT DESCRIPTION



APPLICATION: Offices, meeting rooms
Shops, commercial areas.
Supermarkets
Seminar rooms, conference rooms.
Ceiling recessed luminaire

MATERIALS EXECUTION: Soft steel sheet body, with anti-corrosion treatment.
White coated body. UV protected.
Fixing brackets supplied with the luminaire.
Prismatic acrylic diffuser

MAINS SUPPLY AND WIRING: Voltage and frequency supply of the luminaire (230V at 50Hz).
Luminaire wired with electronic driver.
Luminaire suitable for looping-in connection.



ACCESSORIES

OPTIONS: Luminaire wired with electronic driver for dimming, Luminaire with emergency unit.

TECHNICAL DATA

	Luminous Flux (Lm)	System Power (W)	Luminous Efficacy (lm/W)	LED Risk Group	Colour Temp. (K)	UGR		Dimensions (mm)				
						(X= 4H; Y= 8H; S= 0,25H)		Length	Width	Height	Fixation	Recessed
						Tran.	Long.	C	L	A	F1	E
EUROLEDD 02 06064-07 DE 3000lm	2322	20,24	115	1	4000	19.5	20.4	595	595	55	n/a	565x565


OTHER TECHNICAL INFORMATION

CRI: > 80


Photometric Code: 840/349

Lifetime Factor (L80B10) @ Ta=25°C: 50.000 h

POLAR DIAGRAM



ENERGY LABEL

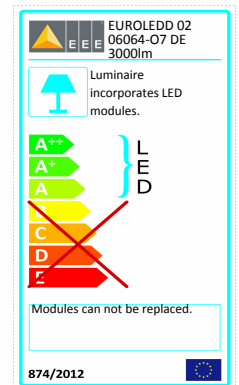

NORMS

EN 60598-1, EN 55015, EN 61000-3-2, EN 61547, EN 60598-2-2, 2014/30/EU, 2014/35/EU, 2011/65/EU (RoHS), (EU) N° 1194/2012 (Ecodesign)