



PRODUCT DESCRIPTION



APPLICATION: Food industries, kitchens, canteens.
Public areas, corridors
Sheltered outdoor areas
Ceiling surface-mounted luminaire.
Ceiling semi-recessed luminaire.

MATERIALS Polycarbonate body.
EXECUTION: Sealing gasket to ensure watertightness.
Diffuser in opal polycarbonate

MAINS SUPPLY AND WIRING Voltage and frequency supply of the luminaire (230V at 50Hz).
Luminaire wired with electronic driver.

ACCESSORIES Length 260 mm, Length 260 mm, Length 260 mm.

OPTIONS



TECHNICAL DATA

	Luminous Flux (Lm)	System Power (W)	Luminous Efficacy (lm/W)	LED Risk Group	Colour Temp. (K)	UGR		Dimensions (mm)				
						(X= 4H; Y= 8H; S= 0,25H)		Length	Width	Height	Fixation	Recessed
						Tran.	Long.					
GSLD 01 04044-R8 DE 1510lm	1237	9.79	126	n/a	4000	21,3	21,2	325	325	97	n/a	265x265


OTHER TECHNICAL INFORMATION

CRI: > 80


Photometric Code: 840/359

Lifetime Factor (L90F10) @ Ta=25°C: 50.000 h

POLAR DIAGRAM



ENERGY LABEL

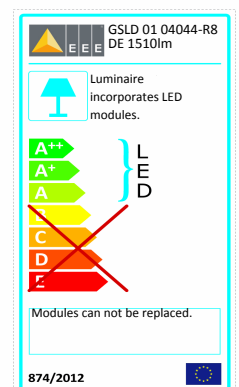

NORMS

EN 60598-1, EN 62031, EN 55015, EN 61000-3-2, EN 61547, 2011/65/CE (Rohs), 2014/35/EU, 2011/65/EU (Rohs), (EU) N° 1194/2012 (Ecodesign), EN 60598-2-1