



Technical Data Sheet

GSP 01 121 BE BK



PRODUCT DESCRIPTION




APPLICATION: Food industries, kitchens, canteens.
Public areas, corridors
Sheltered outdoor areas
Ceiling surface-mounted luminaire.
Ceiling semi-recessed luminaire.

MATERIALS EXECUTION: Sealing gasket to ensure watertightness.
Semi Opal polycarbonate diffuser

MAINS SUPPLY AND WIRING: Voltage and frequency supply of the luminaire (230V at 50Hz).
Electrified lamp with electronic ballast (power supply AC OR DC).

ACCESSORIES: Length 260 mm, Length 260 mm, Length 260 mm, Length 260 mm.

OPTIONS: Inductive lamp equipped with conventional ballast.




TECHNICAL DATA

	Luminous Flux (Lm)	Nº Lamp. x Power (W)	Luminous Efficacy (lm/W)	LED Risk Group	Colour Temp. (K)	UGR		Dimensions (mm)				
						(X= 4H; Y= 8H; S= 0,25H)		Length	Width	Height	Fixation	Recessed
						Tran.	Long.					
GSP 01 121 BE BK	n/a	21,00	n/a	n/a	n/a	22.0	21.5	260	260	78	n/a	210x210


OTHER TECHNICAL INFORMATION

CRI: >
Photometric Code:
Rendement: 65%

POLAR DIAGRAM



ENERGY LABEL

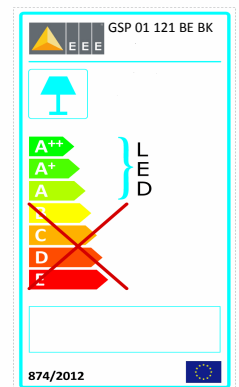

NORMS