

### PRODUCT DESCRIPTION

**APPLICATION:** Food industries, kitchens, canteens.  
Ceiling recessed luminaire

**MATERIALS EXECUTION:** Zinc sheet body, with anti-corrosion treatment.  
White coated body. UV protected.  
Sealing gasket to ensure watertightness.  
Fixing brackets supplied with the luminaire.

**MAINS SUPPLY AND WIRING:** Voltage and frequency supply of the luminaire (230V at 50Hz).  
Electrified lamp with electronic ballast (power supply AC OR DC).  
Luminaire suitable for looping-in connection.

### ACCESSORIES

### OPTIONS

### TECHNICAL DATA

	Luminous Flux (Lm)	Nº Lamp. x Power (W)	Luminous Efficacy (lm/W)	LED Risk Group	Colour Temp. (K)	UGR		Dimensions (mm)				
						(X= 4H; Y= 8H; S= 0,25H)		Length	Width	Height	Fixation	Recessed
						Tran.	Long.					
HFI 03 214 BE	n/a	28,00	n/a	n/a	n/a	19.1	18.7	595	295	115	n/a	566 x 266


### OTHER TECHNICAL INFORMATION

**CRI:** > 80


**Photometric Code:** 840

**Rendimento:** 54%

### POLAR DIAGRAM



### ENERGY LABEL

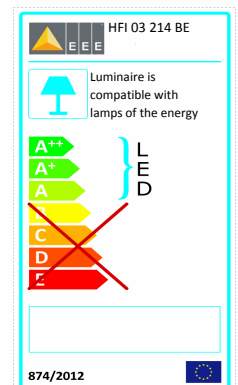

### NORMS

EN 60598-1, EN 55015, EN 61000-3-2, EN 61547, 2011/65/CE (Rohs), EN 60598-2-2, 2014/30/EU, 2014/35/EU, 2011/65/EU (Rohs), (EU) N° 1194/2012 (Ecodesign)