

PRODUCT DESCRIPTION

APPLICATION: Food industries, kitchens, canteens.
Ceiling recessed luminaire

MATERIALS EXECUTION: Zinc sheet body, with anti-corrosion treatment.
White coated body. UV protected.
Sealing gasket to ensure watertightness.
Fixing brackets supplied with the luminaire.

MAINS SUPPLY AND WIRING: Voltage and frequency supply of the luminaire (230V at 50Hz).
Electrified lamp with electronic ballast (power supply AC OR DC).
Luminaire suitable for looping-in connection.

ACCESSORIES

OPTIONS


TECHNICAL DATA

	Luminous Flux (Lm)	Nº Lamp. x Power (W)	Luminous Efficacy (lm/W)	LED Risk Group	Colour Temp. (K)	UGR		Dimensions (mm)				
						(X= 4H; Y= 8H; S= 0,25H)		Length	Width	Height	Fixation	Recessed
						Tran.	Long.					
HFI 03 254 BE	n/a	108,00	n/a	n/a	n/a	21.3	21.4	1195	295	115	n/a	1166 x 267


OTHER TECHNICAL INFORMATION

CRI: > 80
Photometric Code: 840
Rendement: 61,7%

POLAR DIAGRAM



ENERGY LABEL

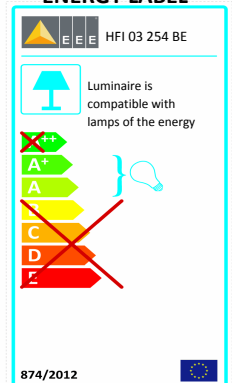

NORMS

EN 60598-1, EN 55015, EN 61000-3-2, EN 61547, 2011/65/CE (Rohs), EN 60598-2-2, 2014/30/EU, 2014/35/EU, 2011/65/EU (Rohs), (EU) N° 1194/2012 (Ecodesign)