




# Technical Data Sheet

## HRXV 01 280 BE




### PRODUCT DESCRIPTION

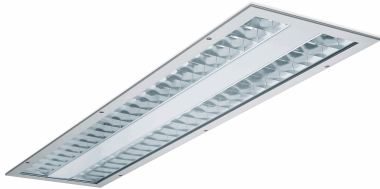


**APPLICATION:** Surgery rooms, clean rooms.  
Laboratories  
Ceiling recessed luminaire

**MATERIALS EXECUTION:** Soft steel sheet body, with anti-corrosion treatment.  
White coated body. UV protected.  
Sealing gasket to ensure watertightness.  
Extruded and anodized aluminium profile frame.  
Luminaire with tempered glass  
Luminaire with aluminum reflector background  
Parabolic reflectors anodized aluminum semispecular high yield, with high coefficient of reflection and without iridescence



**MAINS SUPPLY AND WIRING:** Voltage and frequency supply of the luminaire (230V at 50Hz).  
Electrified lamp with electronic ballast (power supply AC OR DC).  
Luminaire suitable for looping-in connection.



**ACCESSORIES:** HRX fixing kit (2x14 W), HRX fixing kit (4x14 W), HRX fixing kit(2x21 W), HRX fixing kit(2x28 W), HRX fixing kit (2x35 W).



**OPTIONS:** White coated, extruded aluminium profile frame.

### TECHNICAL DATA

	Luminous Flux (Lm)	Nº Lamp. x Power (W)	Luminous Efficacy (lm/W)	LED Risk Group	Colour Temp. (K)	UGR		Dimensions (mm)				
						(X= 4H; Y= 8H; S= 0,25H)		Length	Width	Height	Fixation	Recessed
						Tran.	Long.					
HRXV 01 280 BE	n/a	160,00	n/a	n/a	n/a	14.8	20.7	1495	295	77	n/a	1481x275


### OTHER TECHNICAL INFORMATION

**CRI:** > 80


**Photometric Code:** 840

**Rendimento:** 88%

### POLAR DIAGRAM



### ENERGY LABEL

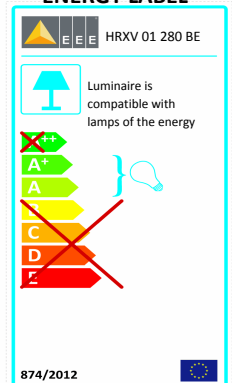

### NORMS

EN 60598-1, EN 55015, EN 61000-3-2, EN 61547, EN 60598-2-2, 2014/30/EU, 2014/35/EU, 2011/65/EU (Rohs), (EU) Nº 1194/2012 (Ecodesign)