



### PRODUCT DESCRIPTION

**APPLICATION:** Offices, meeting rooms  
Shops, commercial areas.  
General-purpose areas, with no specific risks  
Ceiling recessed luminaire

**MATERIALS EXECUTION:** Soft steel sheet body, with anti-corrosion treatment.  
White coated body. UV protected.  
Fixing brackets supplied with the luminaire.

**MAINS SUPPLY AND WIRING:** Voltage and frequency supply of the luminaire (230V at 50Hz).  
Electrified lamp with electronic ballast (power supply AC OR DC).  
Luminaire suitable for looping-in connection.

### ACCESSORIES

**OPTIONS:** wieland, Linker subculture back luminaire, Steel cable + lamps + film on the grill + PLUG IN, Luminaire wired with electronic ballast for dimming.

### TECHNICAL DATA

	Luminous Flux (lm)	Nº Lamp. x Power (W)	Luminous Efficacy (lm/W)	LED Risk Group	Colour Temp. (K)	UGR		Dimensions (mm)				
						(X= 4H; Y= 8H; S= 0,25H)		Length	Width	Height	Fixation	Recessed
						Tran.	Long.					
IGLX 01 214 BE RALT 9010	n/a	28,00	n/a	n/a	n/a	15.5	14.6	595	595	90	n/a	585x585


### OTHER TECHNICAL INFORMATION

**CRI:** > 80


**Photometric Code:** 840

**Rendement:** 81,2%

### POLAR DIAGRAM



### ENERGY LABEL

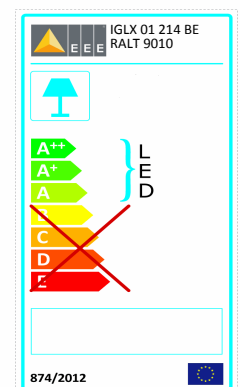

### NORMS