





# Technical Data Sheet

## IGPLI1 01 06064-O7 DE 6000lm RALT9016



### PRODUCT DESCRIPTION

**APPLICATION:** Offices, meeting rooms  
Shops, commercial areas.  
General-purpose areas, with no specific risks  
Ceiling recessed luminaire

**MATERIALS EXECUTION:** Soft steel sheet body, with anti-corrosion treatment.  
White coated body. UV protected.  
Fixing brackets supplied with the luminaire.  
Luminaire with semiopaline acrylic film

PMMA clear semi-opal diffuser and brightview.

**MAINS SUPPLY AND WIRING:** Voltage and frequency supply of the luminaire (230V at 50Hz).  
Luminaire wired with electronic driver.

### ACCESSORIES

**OPTIONS:** Luminaire wired with electronic driver for dimming, Luminaire with DALI equipment, Luminaire with emergency unit.

### TECHNICAL DATA

	Luminous Flux (Lm)	System Power (W)	Luminous Efficacy (lm/W)	LED Risk Group	Colour Temp. (K)	UGR		Dimensions (mm)				
						(X= 4H; Y= 8H; S= 0,25H)		Length	Width	Height	Fixation	Recessed
						Tran.	Long.					
IGPLI1 01 06064-O7 DE 6000lm	2750	40,48	68	1	4000	19.7	19.7	595	595	101	n/a	577x577


### OTHER TECHNICAL INFORMATION

CRI: > 80


Photometric Code: 840/349

Lifetime Factor (L80B10) @ Ta=25°C: 50.000 h

### POLAR DIAGRAM



### ENERGY LABEL

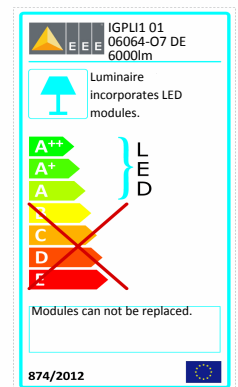

### NORMS

EN 60598-1, EN 55015, EN 61000-3-2, EN 61547, EN 60598-2-2, 2014/30/EU, 2014/35/EU, 2011/65/EU (RoHS), (EU) N° 1194/2012 (Ecodesign)