

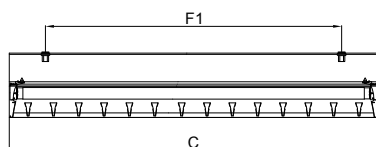




# Technical Data Sheet

## LPMC 01 149 BE



### PRODUCT DESCRIPTION

<b>APPLICATION:</b>	Offices, meeting rooms Shops, commercial areas. General-purpose areas, with no specific risks Suspended luminaire Ceiling surface-mounted luminaire. Luminaire for continuous line
<b>MATERIALS EXECUTION:</b>	Extruded anodized aluminium profile body. Die-cast aluminum end-caps. Parabolic reflectors anodized matte aluminum high yield, with high coefficient of reflection and without iridescence
<b>MAINS SUPPLY AND WIRING</b>	Voltage and frequency supply of the luminaire (230V at 50Hz). 5 modules electrified conductors 1.5 mm <sup>2</sup> and 7 quick-connect terminals. Electrified lamp with electronic ballast (power supply AC OR DC).
<b>ACCESSORIES</b>	FA 500 mm, FA 1000 mm, FA 1500 mm, FA-AN 500 mm, PM end-cap, FA-AN 1000 mm, FA-AN 1500 mm, FAC 500 mm, FAC 1000 mm, FAC 1500 mm, FAC-AN 500 mm, FAC-AN 1000 mm, FAC-AN 1500 mm, Mains connector (female).
<b>OPTIONS</b>	Luminaire wired with electronic ballast for dimming.


### TECHNICAL DATA

	Luminous Flux (Lm)	Nº Lamp. x Power (W)	Luminous Efficacy (lm/W)	LED Risk Group	Colour Temp. (K)	UGR		Dimensions (mm)				
						(X= 4H; Y= 8H; S= 0,25H)		Length	Width	Height	Fixation	Suspension
						Tran.	Long.					
LPMC 01 149 BE	n/a	49,00	n/a	n/a	n/a	15.8	17.0	1470	87	89	1370	n/a


### OTHER TECHNICAL INFORMATION

**CRI:** > 80  
**Photometric Code:** 840  
**Rendement:** 62,8%

### POLAR DIAGRAM



### ENERGY LABEL

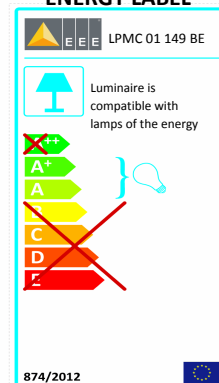

### NORMS

EN 60598-1, EN 55015, EN 61000-3-2, EN 61547, 2014/30/EU, 2014/35/EU, 2011/65/EU (Rohs), (EU) N° 1194/2012 (Ecodesign), EN 60598-2-1