




# Technical Data Sheet

## LTPPL1-MFI 02 09014-5D DE 2181lm RALT 9016



### PRODUCT DESCRIPTION

**APPLICATION:** Offices, meeting rooms  
Shops, commercial areas.  
General-purpose areas, with no specific risks  
Ceiling recessed luminaire  
Luminaire for continuous line

**MATERIALS EXECUTION:** Lacquered and anodized aluminium profile body.  
Fixing brackets supplied with the luminaire.  
Die-cast aluminum end-caps.  
White Textured/ RALT 9016  
Luminaire with  $\leq 19$  UGR (Unified Glare Ratio)  
LMO - Linear Micro Optics®. Coated linear micro optics with a reflector.

**MAINS SUPPLY AND WIRING:** Voltage and frequency supply of the luminaire (230V at 50Hz).  
5 modules electrified conductors 1.5 mm<sup>2</sup> and 7 quick-connect terminals.  
Luminaire wired with electronic driver.

### ACCESSORIES

Luminaire wired with electronic driver for dimming.

### OPTIONS

### TECHNICAL DATA

|                                  | Luminous Flux (Lm) | System Power (W) | Luminous Efficacy (lm/W) | LED Risk Group | Colour Temp. (K) | UGR                      |       | Dimensions (mm) |       |        |          |          |
|----------------------------------|--------------------|------------------|--------------------------|----------------|------------------|--------------------------|-------|-----------------|-------|--------|----------|----------|
|                                  |                    |                  |                          |                |                  | (X= 4H; Y= 8H; S= 0,25H) |       | Length          | Width | Height | Fixation | Recessed |
|                                  |                    |                  |                          |                |                  | Tran.                    | Long. |                 |       |        |          |          |
| LTPPL1-MFI 02 09014-5D DE 2181lm | 1839               | 14.36            | 128                      | 0              | 4000             | 17,9                     | 20,5  | 854             | 88    | 75     | n/a      | 850 x 78 |


### OTHER TECHNICAL INFORMATION

CRI: > 80


Photometric Code: 840/xxx

Lifetime Factor (L80B10) @ Ta=25°C: 50.000 h

### POLAR DIAGRAM



### ENERGY LABEL

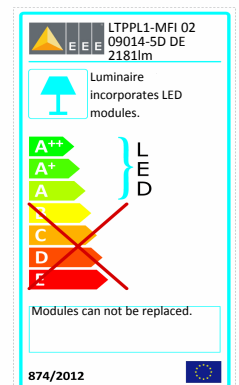

### NORMS

EN 60598-1, EN 55015, EN 61000-3-2, EN 61547, EN 60598-2-2, 2014/30/EU, 2014/35/EU, 2011/65/EU (Rohs), (EU) N° 1194/2012 (Ecodesign)