

### PRODUCT DESCRIPTION

**APPLICATION:** Offices, meeting rooms  
Shops, commercial areas.  
General-purpose areas, with no specific risks  
Suspended luminaire

**MATERIALS EXECUTION:** Extruded anodized aluminium profile body.  
Injected V0 polycarbonate end-caps.  
Luminaire with aluminum reflector background  
Parabolic reflectors anodized specular aluminum high yield, with high coefficient of reflection and without iridescence

**MAINS SUPPLY AND WIRING:** Voltage and frequency supply of the luminaire (230V at 50Hz).  
Electrified lamp with electronic ballast (power supply AC OR DC).

**ACCESSORIES:** PH coupling set, PH 90° coupling set, PH 120° coupling set, PH 135° coupling set.

**OPTIONS:** Luminaire wired with electronic ballast for dimming.

### TECHNICAL DATA

	Luminous Flux (lm)	Nº Lamp. x Power (W)	Luminous Efficacy (lm/W)	LED Risk Group	Colour Temp. (K)	UGR		Dimensions (mm)				
						(X= 4H; Y= 8H; S= 0,25H)		Length	Width	Height	Fixation	Suspension
						Tran.	Long.					
PHB 02 135 BE	n/a	35,00	n/a	n/a	n/a	19.2	20.2	1486	47	93	n/a	1459


### OTHER TECHNICAL INFORMATION

**CRI:** > 80


**Photometric Code:** 840

**Rendimento:** 71,2%

### POLAR DIAGRAM



### ENERGY LABEL

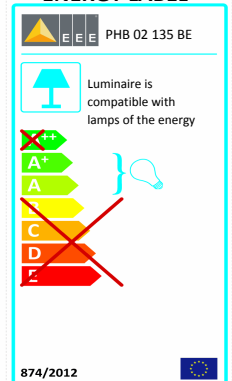

### NORMS

EN 60598-1, EN 55015, EN 61000-3-2, EN 61547, 2014/30/EU, 2014/35/EU, 2011/65/EU (Rohs), (EU) N° 1194/2012 (Ecodesign), EN 60598-2-1