

PRODUCT DESCRIPTION

APPLICATION: Offices, meeting rooms
Shops, commercial areas.
General-purpose areas, with no specific risks
Suspended luminaire

MATERIALS EXECUTION: Extruded anodized aluminium profile body.
Injected V0 polycarbonate end-caps.
Semi opal sanded polycarbonate diffuser

MAINS SUPPLY AND WIRING: Voltage and frequency supply of the luminaire (230V at 50Hz).
Electrified lamp with electronic ballast (power supply AC OR DC).

ACCESSORIES: PH coupling set, PH 90° coupling set, PH 120° coupling set, PH 135° coupling set.

OPTIONS: Luminaire wired with electronic ballast for dimming.

TECHNICAL DATA

	Luminous Flux (Lm)	Nº Lamp. x Power (W)	Luminous Efficacy (lm/W)	LED Risk Group	Colour Temp. (K)	UGR		Dimensions (mm)				
						(X= 4H; Y= 8H; S= 0,25H)		Length	Width	Height	Fixation	Suspension
						Tran.	Long.					
PHN 02 128 BE	n/a	28,00	n/a	n/a	n/a	22.8	23.8	1186	47	93	n/a	1159


OTHER TECHNICAL INFORMATION

CRI: > 80


Photometric Code: 840

Rendimento: 54,3%

POLAR DIAGRAM



ENERGY LABEL

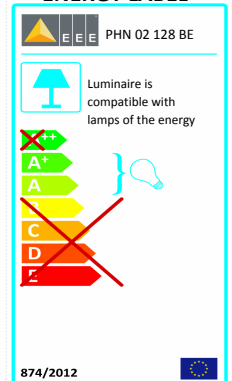

NORMS

EN 60598-1, EN 55015, EN 61000-3-2, EN 61547, 2014/30/EU, 2014/35/EU, 2011/65/EU (Rohs), (EU) N° 1194/2012 (Ecodesign), EN 60598-2-1