

### PRODUCT DESCRIPTION

**APPLICATION:** Offices, meeting rooms  
Shops, commercial areas.  
General-purpose areas, with no specific risks  
Suspended luminaire  
Ceiling surface-mounted luminaire.

**MATERIALS EXECUTION:** Extruded anodized aluminium profile body.  
Die-cast aluminum end-caps.  
Parabolic reflectors anodized matte aluminum high yield, with high coefficient of reflection and without iridescence

**MAINS SUPPLY AND WIRING:** Voltage and frequency supply of the luminaire (230V at 50Hz).  
Electrified lamp with electronic ballast (AC power).

**ACCESSORIES:** FA 500 mm, FA 1000 mm, FA 1500 mm, FA-AN 500 mm, FA-AN 1000 mm, FA-AN 1500 mm, FAC 500 mm, FAC 1000 mm, FAC 1500 mm, FAC-AN 500 mm, FAC-AN 1000 mm, FAC-AN 1500 mm.

**OPTIONS:** Luminaire wired with electronic ballast for dimming.

### TECHNICAL DATA

	Luminous Flux (Lm)	Nº Lamp. x Power (W)	Luminous Efficacy (lm/W)	LED Risk Group	Colour Temp. (K)	UGR		Dimensions (mm)				
						(X= 4H; Y= 8H; S= 0,25H)		Length	Width	Height	Fixation	Suspension
						Tran.	Long.					
PMC 01 128 BE	n/a	28,00	n/a	n/a	n/a	15.8	16.0	1181	87	89	1070	n/a


### OTHER TECHNICAL INFORMATION

**CRI:** > 80


**Photometric Code:** 840

**Rendimento:** 65,1%

### POLAR DIAGRAM



### ENERGY LABEL

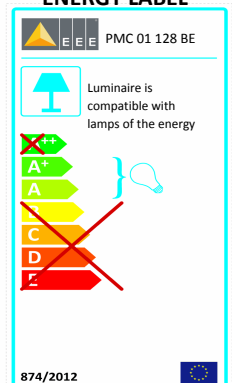

### NORMS

EN 60598-1, EN 55015, EN 61000-3-2, EN 61547, 2014/30/EU, 2014/35/EU, 2011/65/EU (RoHS), (EU) N° 1194/2012 (Ecodesign), EN 60598-2-1