



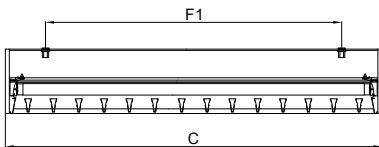

Technical Data Sheet

PMC 01 154 BE



PRODUCT DESCRIPTION

APPLICATION: Offices, meeting rooms
Shops, commercial areas.
General-purpose areas, with no specific risks
Suspended luminaire
Ceiling surface-mounted luminaire.

MATERIALS EXECUTION: Extruded anodized aluminium profile body.
Die-cast aluminum end-caps.
Parabolic reflectors anodized matte aluminum high yield, with high coefficient of reflection and without iridescence

MAINS SUPPLY AND WIRING: Voltage and frequency supply of the luminaire (230V at 50Hz).
Electrified lamp with electronic ballast (AC power).

ACCESSORIES: FA 500 mm, FA 1000 mm, FA 1500 mm, FA-AN 500 mm, FA-AN 1000 mm, FA-AN 1500 mm, FAC 500 mm, FAC 1000 mm, FAC 1500 mm, FAC-AN 500 mm, FAC-AN 1000 mm, FAC-AN 1500 mm.

OPTIONS: Luminaire wired with electronic ballast for dimming.

TECHNICAL DATA

	Luminous Flux (Lm)	Nº Lamp. x Power (W)	Luminous Efficacy (lm/W)	LED Risk Group	Colour Temp. (K)	UGR		Dimensions (mm)				
						(X= 4H; Y= 8H; S= 0,25H)		Length	Width	Height	Fixation	Suspension
						Tran.	Long.					
PMC 01 154 BE	n/a	54,00	n/a	n/a	n/a	18.1	18.0	1181	87	89	1070	n/a


OTHER TECHNICAL INFORMATION

CRI: > 80


Photometric Code: 840

Rendimento: 66,3%

POLAR DIAGRAM



ENERGY LABEL

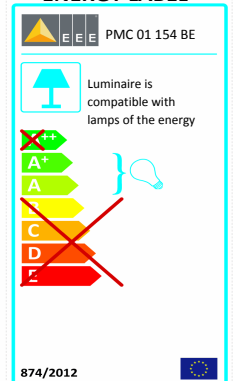

NORMS

EN 60598-1, EN 55015, EN 61000-3-2, EN 61547, 2014/30/EU, 2014/35/EU, 2011/65/EU (Rohs), (EU) N° 1194/2012 (Ecodesign), EN 60598-2-1