

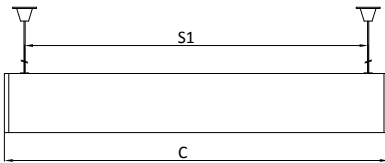




Technical Data Sheet

PPLQB0106 02 06014-H0 DE 2100lm



PRODUCT DESCRIPTION

APPLICATION: Offices, meeting rooms
Shops, commercial areas.
General-purpose areas, with no specific risks
Suspended luminaire

MATERIALS EXECUTION: Extruded anodized aluminium profile body.
Reflector metalized nylon
Reflector injected, bright metallic

MAINS SUPPLY AND WIRING: Voltage and frequency supply of the luminaire (230V at 50Hz).
Luminaire wired with electronic driver.
Quick Attach System.
Luminaire supplied with light source incorporated.

ACCESSORIES: SIS 500 mm, SIS 1000 mm, SIS 1500 mm, SIS-AN 500 mm, SIS-AN 1000 mm, SIS-AN 1500 mm, SISL-AN 500mm, SISL-AN 1000mm, SISL-AN 1500mm, 3-pole power supply connector.

OPTIONS: Luminaire wired with electronic driver for dimming, BlackTextured gray / RALT 9005 (on request), White Textured/ RALT 9016 (on request).

TECHNICAL DATA

| | Luminous Flux (Lm) | System Power (W) | Luminous Efficacy (lm/W) | LED Risk Group | Colour Temp. (K) | UGR | | Dimensions (mm) | | | | |
|---------------------------------|--------------------|------------------|--------------------------|----------------|------------------|--------------------------|-------|-----------------|-------|--------|----------|------------|
| | | | | | | (X= 4H; Y= 8H; S= 0,25H) | | Length | Width | Height | Fixation | Suspension |
| | | | | | | Tran. | Long. | | | | | |
| PPLQB0106 02 06014-H0 DE 2100lm | 1726 | 11,22 | 154 | 2 | 4000 | 16.8 | 16.9 | 512 | 70 | 75 | n/a | 421 |


OTHER TECHNICAL INFORMATION

CRI: > 80


Photometric Code: 840/359

Lifetime Factor (L70B10) @ Ta=25°C: 50.000 h

POLAR DIAGRAM



ENERGY LABEL

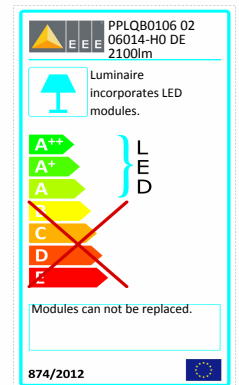

NORMS

EN 60598-1, EN 60598-2-22, EN 55015, EN 61000-3-2, EN 61547, 2014/30/EU, 2014/35/EU, 2011/65/EU (RoHS), (EU) N° 1194/2012 (Ecodesign), EN 60598-2-1