
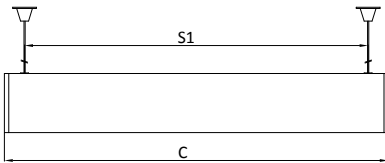



PPLQB0114 02 12014-H0 DE 4900lm



PRODUCT DESCRIPTION

APPLICATION: Offices, meeting rooms
Shops, commercial areas.
General-purpose areas, with no specific risks
Suspended luminaire

MATERIALS EXECUTION: Extruded anodized aluminium profile body.
Reflector metalized nylon
Reflector injected, bright metallic

MAINS SUPPLY AND WIRING: Voltage and frequency supply of the luminaire (230V at 50Hz).
Luminaire wired with electronic driver.
Quick Attach System.
Luminaire supplied with light source incorporated.

ACCESSORIES: SIS 500 mm, SIS 1000 mm, SIS 1500 mm, SIS-AN 500 mm, SIS-AN 1000 mm, SIS-AN 1500 mm, SISL-AN 500mm, SISL-AN 1000mm, SISL-AN 1500mm, 3-pole power supply connector.

OPTIONS: Luminaire wired with electronic driver for dimming, BlackTextured gray / RALT 9005 (on request), White Textured/ RALT 9016 (on request).

TECHNICAL DATA

	Luminous Flux (Lm)	System Power (W)	Luminous Efficacy (lm/W)	LED Risk Group	Colour Temp. (K)	UGR		Dimensions (mm)				
						(X= 4H; Y= 8H; S= 0,25H)		Length	Width	Height	Fixation	Suspension
						Tran.	Long.					
PPLQB0114 02 12014-H0 DE 4900lm	4008	26,18	153	2	4000	16.8	17.0	1180	70	75	n/a	1089


OTHER TECHNICAL INFORMATION

CRI: > 80


Photometric Code: 840/359

Lifetime Factor (L70B10) @ Ta=25°C: 50.000 h

POLAR DIAGRAM



ENERGY LABEL

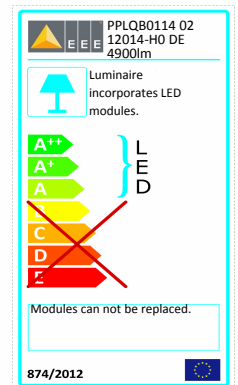

NORMS

EN 60598-1, EN 60598-2-22, EN 55015, EN 61000-3-2, EN 61547, 2014/30/EU, 2014/35/EU, 2011/65/EU (RoHS), (EU) N° 1194/2012 (Ecodesign), EN 60598-2-1