




# Technical Data Sheet

## PULG 03 18014-C9 DE 3165lm RALT 9005



### PRODUCT DESCRIPTION





**APPLICATION:** Offices, meeting rooms  
Shops, commercial areas.  
Supermarkets  
General-purpose areas, with no specific risks  
Suspended luminaire

**MATERIALS EXECUTION:** Extruded anodized aluminium profile body.  
Die-cast aluminum end-caps.  
Polycarbonate Grid with PMMA lens

**MAINS SUPPLY AND WIRING:** Voltage and frequency supply of the luminaire (230V at 50Hz).  
Luminaire wired with electronic driver.

**ACCESSORIES:** FA 500 mm, FA 1000 mm, FA 1500 mm, SIS 500 mm, SIS 1000 mm, FA-AN 500 mm, FA-AN 1000 mm, SIS 1500 mm, SIS-AN 500 mm, FA-AN 1500 mm, FAC 500 mm, SIS-AN 1000 mm, SIS-AN 1500 mm, FAC 1000 mm, FAC 1500 mm, SISL-AN 500mm, SISL-AN 1000mm, FAC-AN 500 mm, FAC-AN 1000 mm, SISL-AN 1500mm, FAC-AN 1500 mm.

**OPTIONS:** Luminaire wired with electronic driver for dimming, Luminaire equipped with emergency kit 1H, Luminaire suitable for looping-in connection.



### TECHNICAL DATA

	Luminous Flux (Lm)	System Power (W)	Luminous Efficacy (lm/W)	LED Risk Group	Colour Temp. (K)	UGR		Dimensions (mm)				
						(X= 4H; Y= 8H; S= 0,25H)		Length	Width	Height	Fixation	Suspension
						Tran.	Long.					
PULG 03 18014-C9 DE 3165lm RALT 9005	2738	22,4	122	1	4000	09.9	10.9	1726	50	56	n/a	825


### OTHER TECHNICAL INFORMATION

CRI: > 80


Photometric Code: 840/3XX

Lifetime Factor (L70B10) @ Ta=25°C: 50.000 h

### POLAR DIAGRAM



### ENERGY LABEL

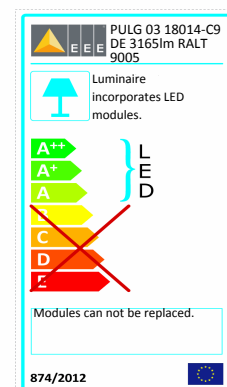

### NORMS

EN 60598-1, EN 55015, EN 61000-3-2, EN 61547, 2014/30/EU, 2014/35/EU, 2011/65/EU (Rohs), (EU) N° 1194/2012 (Ecodesign), EN 60598-2-1