

RTP 01 239 BE



APPLICATION:

IP65 High/Middle bay surface or wall mounted luminaire suitable for:

- Several types of industry;
- Warehouses;
- Exhibition halls;
- Etc.

BODY:

Polycarbonate tubular luminaire

OPTIC:

External diffuser in transparent polycarbonate

WIRING:

Electrified luminaire with electronic power supply (AC or DC power).


Device supplied with power cable 3x0.75mm²

ACCESSORIES:


- KIT Suspension RT;
- KIT - Clamp RT INOX;
- KIT - SIS 500mm;
- KIT - SIS 1000mm;
- KIT - SIS 1500mm;
- KIT - FIXATION RT;
- KIT - FIXATION RT INOX

Voltage / Frequency	230V ~ 50Hz
Electrical Class	CLASSE II
N° of lamps x Wattage (W)	2x39
Lamp Type / Lamp Cap	T5 HO/G5
Efficiency (%) and Photometric Class	79 H + 9 T
Index of protection (watertightness)	IP65
Resistance to Glow Wire (°C)	850
Mechanical impact protection index	IK06
Cable max temperature (°C)	90

Norms	EN 60598-1, EN 60598-2-1; EN 55015, EN 61000-3-2, EN 61547; 2014/30/EU, 2014/35/EU; 2011/65/EU (Rohs); (EU) N° 1194/2012 (Ecodesign)
-------	---



Polar Diagram

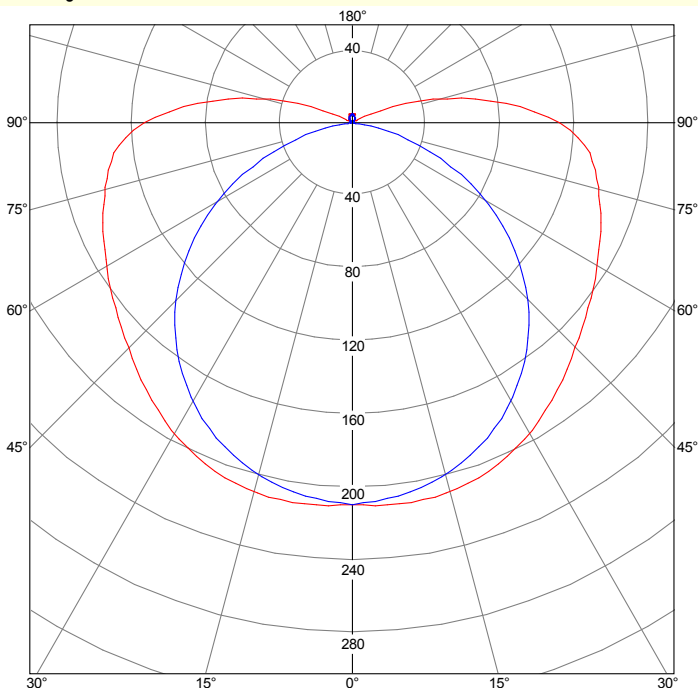

Corrected UGR values


		Reflection Indexes									
Ceiling		0,7	0,7	0,5	0,5	0,3	0,7	0,7	0,5	0,5	0,3
Walls		0,5	0,3	0,5	0,3	0,3	0,5	0,3	0,5	0,3	0,3
Work plane		0,2	0,2	0,2	0,2	0,2	0,2	0,2	0,2	0,2	0,2
Room dimensions		Lamp(s) transversal view					Lamp(s) longitudinal view				
2H	2H	19,4	21,0	20,0	21,5	22,1	17,9	19,4	18,4	19,9	20,5
2H	3H	22,1	23,5	22,6	24,0	24,6	19,3	20,7	19,8	21,2	21,8
2H	4H	23,5	24,8	24,0	25,4	26,0	19,7	21,1	20,3	21,6	22,2
2H	6H	24,9	26,2	25,5	26,7	27,4	20,0	21,3	20,6	21,8	22,5
2H	8H	25,6	26,8	26,1	27,4	28,0	20,0	21,3	20,6	21,8	22,5
2H	12H	26,3	27,5	26,8	28,0	28,7	20,0	21,2	20,6	21,8	22,4
4H	2H	20,1	21,5	20,7	22,0	22,6	19,0	20,3	19,5	20,9	21,5
4H	3H	23,0	24,2	23,6	24,8	25,4	20,6	21,8	21,2	22,4	23,0
4H	4H	24,6	25,7	25,2	26,3	27,0	21,3	22,4	21,9	23,0	23,6
4H	6H	26,3	27,3	26,9	27,9	28,5	21,7	22,7	22,3	23,3	24,0
4H	8H	27,1	28,0	27,7	28,6	29,3	21,8	22,8	22,4	23,4	24,1
4H	12H	27,9	28,8	28,5	29,4	30,1	21,9	22,8	22,5	23,4	24,1
8H	4H	25,0	25,9	25,6	26,6	27,2	22,3	23,2	22,9	23,9	24,5
8H	6H	26,9	27,7	27,5	28,3	29,0	23,1	23,9	23,7	24,5	25,2
8H	8H	28,0	28,7	28,6	29,3	30,0	23,5	24,2	24,1	24,8	25,5
8H	12H	29,0	29,6	29,6	30,3	31,0	23,6	24,3	24,3	24,9	25,6
12H	4H	25,1	25,9	25,7	26,5	27,2	22,6	23,5	23,2	24,1	24,8
12H	6H	27,1	27,8	27,7	28,4	29,1	23,7	24,4	24,3	25,0	25,7
12H	8H	28,2	28,8	28,8	29,5	30,2	24,1	24,8	24,8	25,4	26,1



RTP 01 239 BE



Luminaire is compatible with lamps of the energy classes



874/2012

