






Technical Data Sheet

SLB 01 139 BE RAL 9006



PRODUCT DESCRIPTION

APPLICATION: Offices, meeting rooms
Shops, commercial areas.
General-purpose areas, with no specific risks
Suspended luminaire
Ceiling semi-recessed luminaire.

MATERIALS EXECUTION: Soft steel sheet body, with anti-corrosion treatment.
Aluminium-grey coated body. UV protected.
Injected V0 polycarbonate end-caps.
Luminaire with optical low luminance
Luminance <math><200\text{cd/m}^2</math> at 60°
Luminaire with aluminum reflector background
Parabolic reflectors anodized specular aluminum high yield, with high coefficient of reflection and without iridescence

MAINS SUPPLY AND WIRING Voltage and frequency supply of the luminaire (230V at 50Hz).
Electrified lamp with electronic ballast (power supply AC OR DC).

ACCESSORIES

OPTIONS Luminaire wired with electronic ballast for dimming, White coated body UV protected.

TECHNICAL DATA

	Luminous Flux (Lm)	Nº Lamp. x Power (W)	Luminous Efficacy (lm/W)	LED Risk Group	Colour Temp. (K)	UGR		Dimensions (mm)				
						(X= 4H; Y= 8H; S= 0,25H)		Length	Width	Height	Fixation	Suspension
						Tran.	Long.					
SLB 01 139 BE RAL 9006	n/a	39,00	n/a	n/a	n/a	14.7	17.5	910	89	89	750	n/a


OTHER TECHNICAL INFORMATION

CRI: > 80


Photometric Code: 840

Rendimento: 66,7%

POLAR DIAGRAM



ENERGY LABEL

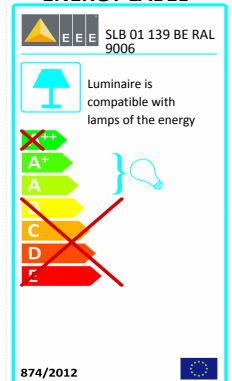

NORMS

EN 60598-1, EN 55015, EN 61000-3-2, EN 61547, 2014/30/EU, 2014/35/EU, 2011/65/EU (Rohs), (EU) N° 1194/2012 (Ecodesign), EN 60598-2-1