




Technical Data Sheet

TELEL 01 05014-A6 NM/180m PRO (EN7010)



PRODUCT DESCRIPTION

APPLICATION: Emergency exits
Ceiling semi-recessed luminaire.

MATERIALS EXECUTION: Extruded anodized aluminium profile body.
Pictogram included.
White coated frame. UV protected.
Injected V0 polycarbonate end-caps.

MAINS SUPPLY AND WIRING: Voltage and frequency supply of the luminaire (230V at 50Hz).
Not maintained

ACCESSORIES

OPTIONS: Luminaire equipped with test button.

TECHNICAL DATA

	Luminous Flux (lm)	System Power (W)	Luminous Efficacy (lm/W)	LED Risk Group	Colour Temp. (K)	UGR		Dimensions (mm)				
						(X= 4H; Y= 8H; S= 0,25H)		Length	Width	Height	Fixation	Recessed
						Tran.	Long.					
TELEL 01 05014-A6 NM/180m PRO (EN7010)	40	n/a	0	1	6500	03.9	13.2	404	96	252	n/a	330 x 75

OTHER TECHNICAL INFORMATION


CRI: > 80

Photometric Code: 840/3XX

Lifetime Factor (L80B10) @ Ta=25°C: 50.000 h

POLAR DIAGRAM

ENERGY LABEL

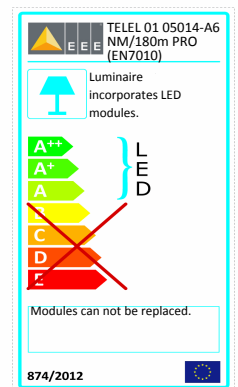

NORMS

EN 60598-1, EN 55015, EN 61000-3-2, EN 61547, 2011/65/CE (Rohs), 2014/30/EU, EN 7010, 2014/35/EU, 2011/65/EU (Rohs), (EU) N° 1194/2012 (Ecodesign), EN 60598-2-1