

### PRODUCT DESCRIPTION

**APPLICATION:** Offices, meeting rooms  
Shops, commercial areas.  
General-purpose areas, with no specific risks  
Public areas, corridors  
Ceiling recessed luminaire

**MATERIALS EXECUTION:** Extruded anodized aluminium profile body.  
Fixing brackets supplied with the luminaire.  
Semi opal sanded polycarbonate diffuser

**MAINS SUPPLY AND WIRING:** Voltage and frequency supply of the luminaire (230V at 50Hz).  
Electrified lamp with electronic ballast (power supply AC OR DC).  
Luminaire suitable for looping-in connection.

**ACCESSORIES:** TPH coupling set, TPH 90° coupling set, TPH 120° coupling set, TPH 135° coupling set.

**OPTIONS:** Luminaire wired with electronic ballast for dimming.

### TECHNICAL DATA

	Luminous Flux (Lm)	Nº Lamp. x Power (W)	Luminous Efficacy (lm/W)	LED Risk Group	Colour Temp. (K)	UGR		Dimensions (mm)				
						(X= 4H; Y= 8H; S= 0,25H)		Length	Width	Height	Fixation	Recessed
						Tran.	Long.					
TPHN 01 380 BE	n/a	240,00	n/a	n/a	n/a	24,9	26,0	4424	59	85	n/a	4417 x 52


### OTHER TECHNICAL INFORMATION

**CRI:** > 80


**Photometric Code:** 840

**Rendimento:** 56,5%

### POLAR DIAGRAM



### ENERGY LABEL

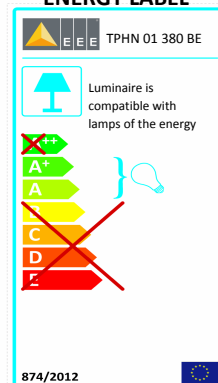

### NORMS

EN 60598-1, EN 55015, EN 61000-3-2, EN 61547, EN 60598-2-2, 2014/30/EU, 2014/35/EU, 2011/65/EU (Rohs), (EU) Nº 1194/2012 (Ecodesign)