




PRODUCT DESCRIPTION




APPLICATION: Offices, meeting rooms
Shops, commercial areas.
General-purpose areas, with no specific risks
Ceiling recessed luminaire

MATERIALS EXECUTION: Soft steel sheet body, with anti-corrosion treatment.
White coated body. UV protected.
Fixing brackets supplied with the luminaire.
Luminaire with optical low luminance
Luminance <math><200\text{cd/m}^2</math> at Parabolic reflectors anodized specular aluminum high yield, with high coefficient of reflection and without iridescence



MAINS SUPPLY AND WIRING Voltage and frequency supply of the luminaire (230V at 50Hz).
Electrified lamp with electronic ballast (power supply AC OR DC).
Luminaire suitable for looping-in connection.



ACCESSORIES

OPTIONS wieland, Linker subculture back luminaire, Steel cable + lamps + film on the grill + PLUG IN, Luminaire wired with electronic ballast for dimming, With air slots upon request.



TECHNICAL DATA

	Luminous Flux (Lm)	Nº Lamp. x Power (W)	Luminous Efficacy (lm/W)	LED Risk Group	Colour Temp. (K)	UGR		Dimensions (mm)				
						(X= 4H; Y= 8H; S= 0,25H)		Length	Width	Height	Fixation	Recessed
						Tran.	Long.					
TRB 04 121 BE	n/a	21,00	n/a	n/a	n/a	16.2	18.7	895	105	65	n/a	882x92


OTHER TECHNICAL INFORMATION

CRI: > 80


Photometric Code: 840

Rendimento: 83,6%

POLAR DIAGRAM



ENERGY LABEL

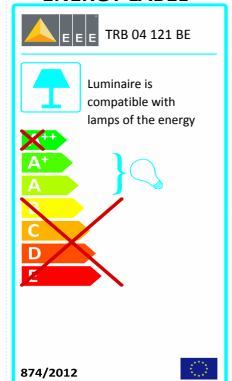

NORMS

EN 60598-1, EN 55015, EN 61000-3-2, EN 61547, EN 60598-2-2, 2014/30/EU, 2014/35/EU, 2011/65/EU (Rohs), (EU) Nº 1194/2012 (Ecodesign)