




### PRODUCT DESCRIPTION




**APPLICATION:** Offices, meeting rooms  
Shops, commercial areas.  
General-purpose areas, with no specific risks  
Ceiling recessed luminaire


**MATERIALS EXECUTION:** Soft steel sheet body, with anti-corrosion treatment.  
White coated body. UV protected.  
Fixing brackets supplied with the luminaire.  
Luminaire with optical low luminance  
Luminance <math><200\text{cd/m}^2</math> at Parabolic reflectors anodized specular aluminum high yield, with high coefficient of reflection and without iridescence



**MAINS SUPPLY AND WIRING** Voltage and frequency supply of the luminaire (230V at 50Hz).  
Electrified lamp with electronic ballast (power supply AC OR DC).  
Luminaire suitable for looping-in connection.



### ACCESSORIES



**OPTIONS** wieland, Linker subculture back luminaire, Steel cable + lamps + film on the grill + PLUG IN, Luminaire wired with electronic ballast for dimming, With air slots upon request.

### TECHNICAL DATA

|               | Luminous Flux (Lm) | Nº Lamp. x Power (W) | Luminous Efficacy (lm/W) | LED Risk Group | Colour Temp. (K) | UGR                      |       | Dimensions (mm) |       |        |          |          |
|---------------|--------------------|----------------------|--------------------------|----------------|------------------|--------------------------|-------|-----------------|-------|--------|----------|----------|
|               |                    |                      |                          |                |                  | (X= 4H; Y= 8H; S= 0,25H) |       | Length          | Width | Height | Fixation | Recessed |
|               |                    |                      |                          |                |                  | Tran.                    | Long. |                 |       |        |          |          |
| TRB 04 139 BE | n/a                | 39,00                | n/a                      | n/a            | n/a              | 17.8                     | 20.3  | 895             | 105   | 65     | n/a      | 882x92   |


### OTHER TECHNICAL INFORMATION

CRI: > 80


Photometric Code: 840

Rendement: 84,8%

### POLAR DIAGRAM



### ENERGY LABEL

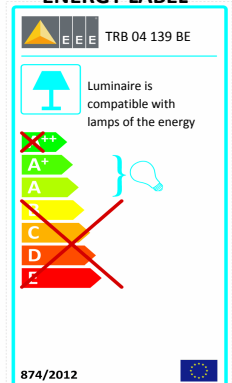

### NORMS

EN 60598-1, EN 55015, EN 61000-3-2, EN 61547, EN 60598-2-2, 2014/30/EU, 2014/35/EU, 2011/65/EU (Rohs), (EU) Nº 1194/2012 (Ecodesign)