




### PRODUCT DESCRIPTION




**APPLICATION:** Offices, meeting rooms  
Shops, commercial areas.  
General-purpose areas, with no specific risks  
Ceiling recessed luminaire


**MATERIALS EXECUTION:** Soft steel sheet body, with anti-corrosion treatment.  
White coated body. UV protected.  
Fixing brackets supplied with the luminaire.  
Luminaire with optical low luminance  
Luminance <math><200\text{cd/m}^2</math> at Parabolic reflectors anodized specular aluminum high yield, with high coefficient of reflection and without iridescence



**MAINS SUPPLY AND WIRING** Voltage and frequency supply of the luminaire (230V at 50Hz).  
Electrified lamp with electronic ballast (power supply AC OR DC).  
Luminaire suitable for looping-in connection.



### ACCESSORIES



**OPTIONS** wieland, Linker subculture back luminaire, Steel cable + lamps + film on the grill + PLUG IN, Luminaire wired with electronic ballast for dimming, With air slots upon request.

### TECHNICAL DATA

	Luminous Flux (Lm)	Nº Lamp. x Power (W)	Luminous Efficacy (lm/W)	LED Risk Group	Colour Temp. (K)	UGR		Dimensions (mm)				
						(X= 4H; Y= 8H; S= 0,25H)		Length	Width	Height	Fixation	Recessed
						Tran.	Long.					
TRB 04 149 BE	n/a	49,00	n/a	n/a	n/a	17.6	19.5	1495	105	65	n/a	1482x92


### OTHER TECHNICAL INFORMATION

**CRI:** > 90


**Photometric Code:** 940

**Rendimento:** 82,1%

### POLAR DIAGRAM



### ENERGY LABEL

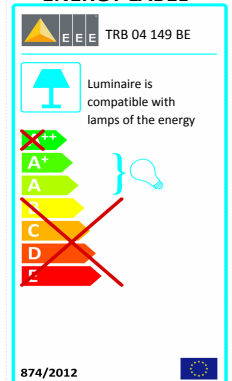

### NORMS

EN 60598-1, EN 55015, EN 61000-3-2, EN 61547, EN 60598-2-2, 2014/30/EU, 2014/35/EU, 2011/65/EU (Rohs), (EU) Nº 1194/2012 (Ecodesign)