



Technical Data Sheet

TRLB 04 09034-O7 DE 4500lm



PRODUCT DESCRIPTION





APPLICATION: Offices, meeting rooms
Shops, commercial areas.
General-purpose areas, with no specific risks
Ceiling recessed luminaire

MATERIALS EXECUTION: Soft steel sheet body, with anti-corrosion treatment.
White coated body. UV protected.
Fixing brackets supplied with the luminaire.
Parabolic reflectors anodized specular aluminum high yield, with high coefficient of reflection and without iridescence

MAINS SUPPLY AND WIRING: Voltage and frequency supply of the luminaire (230V at 50Hz).
Luminaire wired with electronic driver.
Luminaire suitable for looping-in connection.

ACCESSORIES

OPTIONS: wieland, Linker subculture back luminaire, Steel cable + lamps + film on the grill + PLUG IN, Luminaire wired with electronic driver for dimming, Luminaire with emergency unit.



TECHNICAL DATA

	Luminous Flux (Lm)	System Power (W)	Luminous Efficacy (lm/W)	LED Risk Group	Colour Temp. (K)	UGR		Dimensions (mm)				
						(X= 4H; Y= 8H; S= 0,25H)		Length	Width	Height	Fixation	Recessed
						Tran.	Long.					
TRLB 04 09034-O7 DE 4500lm	3065	30,36	101	1	4000	14.0	18.2	895	295	51	n/a	882 x 286


OTHER TECHNICAL INFORMATION

CRI: > 80


Photometric Code: 840/349

Lifetime Factor (L80B10) @ Ta=25°C: 50.000 h

POLAR DIAGRAM



ENERGY LABEL

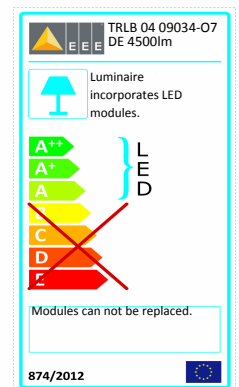

NORMS

EN 60598-1, EN 55015, EN 61000-3-2, EN 61547, EN 60598-2-2, 2014/30/EU, 2014/35/EU, 2011/65/EU (Rohs), (EU) N° 1194/2012 (Ecodesign)