






Technical Data Sheet

TRTI 03 135 BE



PRODUCT DESCRIPTION

APPLICATION: Offices, meeting rooms
Shops, commercial areas.
General-purpose areas, with no specific risks
Ceiling recessed luminaire

MATERIALS EXECUTION: Soft steel sheet body, with anti-corrosion treatment.
White coated body. UV protected.
Fixing brackets supplied with the luminaire.
Luminaire with reflector background in mild steel with electrostatic powder coating in epoxy-polyester white

Semi Opal flat diffuser in PMMA

MAINS SUPPLY AND WIRING: Voltage and frequency supply of the luminaire (230V at 50Hz).
Electrified lamp with electronic ballast (power supply AC OR DC).
Luminaire suitable for looping-in connection.

ACCESSORIES

wieland, Luminaire wired with electronic ballast for dimming.

OPTIONS

TECHNICAL DATA

	Luminous Flux (Lm)	Nº Lamp. x Power (W)	Luminous Efficacy (lm/W)	LED Risk Group	Colour Temp. (K)	UGR		Dimensions (mm)				
						(X= 4H; Y= 8H; S= 0,25H)		Length	Width	Height	Fixation	Recessed
						Tran.	Long.					
TRTI 03 135 BE	n/a	35,00	n/a	n/a	n/a	20.8	21.7	1510	106	88	n/a	1480x93

OTHER TECHNICAL INFORMATION


CRI: > 80

Photometric Code: 840

Rendement: 66,2%

POLAR DIAGRAM

ENERGY LABEL

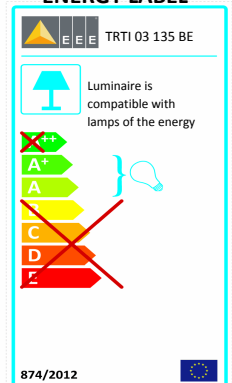

NORMS

EN 60598-1, EN 55015, EN 61000-3-2, EN 61547, 2011/65/CE (Rohs), EN 60598-2-2, 2014/30/EU, 2014/35/EU, 2011/65/EU (Rohs), (EU) N° 1194/2012 (Ecodesign)