



PRODUCT DESCRIPTION

APPLICATION: Offices, meeting rooms
Shops, commercial areas.
General-purpose areas, with no specific risks
Ceiling recessed luminaire

MATERIALS EXECUTION: Soft steel sheet body, with anti-corrosion treatment.
White coated body. UV protected.
Fixing brackets supplied with the luminaire.
Luminaire with reflector background in mild steel with electrostatic powder coating in epoxy-polyester white

Semi Opal flat diffuser in PMMA

MAINS SUPPLY AND WIRING Voltage and frequency supply of the luminaire (230V at 50Hz).
Electrified lamp with electronic ballast (power supply AC OR DC).
Luminaire suitable for looping-in connection.

ACCESSORIES

wieland, Luminaire wired with electronic ballast for dimming.

OPTIONS

TECHNICAL DATA

	Luminous Flux (lm)	Nº Lamp. x Power (W)	Luminous Efficacy (lm/W)	LED Risk Group	Colour Temp. (K)	UGR		Dimensions (mm)				
						(X= 4H; Y= 8H; S= 0,25H)		Length	Width	Height	Fixation	Recessed
						Tran.	Long.					
TRTI 03 235 BE	n/a	70,00	n/a	n/a	n/a	22.1	22.1	1510	178	88	n/a	1480x165


OTHER TECHNICAL INFORMATION

CRI: > 80


Photometric Code: 840

Rendement: 75,9%

POLAR DIAGRAM



ENERGY LABEL

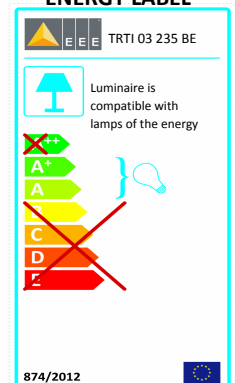

NORMS

EN 60598-1, EN 55015, EN 61000-3-2, EN 61547, 2011/65/CE (Rohs), EN 60598-2-2, 2014/30/EU, 2014/35/EU, 2011/65/EU (Rohs), (EU) N° 1194/2012 (Ecodesign)