

PRODUCT DESCRIPTION

APPLICATION: Offices, meeting rooms
Shops, commercial areas.
General-purpose areas, with no specific risks
Ceiling recessed luminaire

MATERIALS EXECUTION: Soft steel sheet body, with anti-corrosion treatment.
White coated body. UV protected.
Fixing brackets supplied with the luminaire.
Parabolic reflectors anodized aluminum mirror with high reflection coefficient

MAINS SUPPLY AND WIRING: Voltage and frequency supply of the luminaire (230V at 50Hz).
Electrified lamp with electronic ballast (power supply AC OR DC).
Luminaire suitable for looping-in connection.

ACCESSORIES

OPTIONS: wieland, Linker subculture back luminaire, Steel cable + lamps + film on the grill + PLUG IN, Luminaire wired with electronic ballast for dimming, With air slots upon request.

TECHNICAL DATA

	Luminous Flux (Lm)	Nº Lamp. x Power (W)	Luminous Efficacy (lm/W)	LED Risk Group	Colour Temp. (K)	UGR		Dimensions (mm)				
						(X= 4H; Y= 8H; S= 0,25H)		Length	Width	Height	Fixation	Recessed
						Tran.	Long.					
TRU 04 139 BE	n/a	39,00	n/a	n/a	n/a	17.8	19.7	895	105	65	n/a	882x92


OTHER TECHNICAL INFORMATION

CRI: > 80


Photometric Code: 840

Rendimento: 73%

POLAR DIAGRAM



ENERGY LABEL

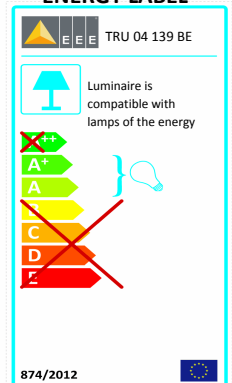

NORMS

EN 60598-1, EN 55015, EN 61000-3-2, EN 61547, EN 60598-2-2, 2014/30/EU, 2014/35/EU, 2011/65/EU (Rohs), (EU) Nº 1194/2012 (Ecodesign)