


APL772

WALL SCONCE



According to EN60 598-2-2



Product Description

Applications

Shops, commercial areas, General-purpose areas, with no specific risks; Public areas, corridors.

Assembly

Wall surface-mounted luminaire.

Execution

Extruded aluminium profile body white coated. UV protected.

Light Distribution

Direct and indirect light distribution.

Optics

PMMA lens.

Options

Luminaire wired with electronic driver for dimming.
Emergency kit for 1222mm and 1502mm Length.

Light Source

LED 4000K , C R I> 80 , 50.000h @ L70, B10, Ta 25°C

Ref.


APL772 01 07024-62 DE 3000lm RALT 9016
APL772 01 07024-63 DE 6000lm RALT 9016
 APL772 01 10024-62 DE 4500lm RALT 9016
APL772 01 10024-63 DE 9000lm RALT 9016
 PL772 01 13024-62 DE 6000lm RALT 9016
APL772 01 13024-63 DE 12000lm RALT 9016
 APL772 01 16024-62 DE 7500lm RALT9016
APL772 01 16024-63 DE 15000lm RALT 9016

Art.


11A61SR521R51005AN3
11A61SR521R51005D02
 11A61SR521R51005J06
11A61SR521R51005L38
 11A61SR521R51005AL0
11A61SR521R51005AL1
 11A61SR521R51005AL2
11A61SR521R51005AL3

L (mm)	W (mm)	H (mm)	D Fixation wall distance (mm)
662	50	200	362
662	50	200	362
942	50	200	542
942	50	200	542
1222	50	200	922
1222	50	200	922
1502	50	200	1202
1502	50	200	1202

EE Energetic Efficiency	W
134 lm/W	21,9 W
133 lm/W	40,3 W
133 lm/W	31,1 W
132 lm/W	58,7 W
136 lm/W	40,3 W
134 lm/W	77,1 W
135 lm/W	49,5 W
134 lm/W	95,5 W

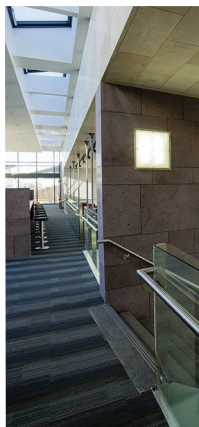

APL772 WALL SCONCE



APL772 01 10024-62 DE 4500lm RALT9016
