

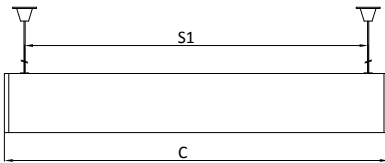




# Technical Data Sheet

## PPL-MFI 02 09014-5D DE 2181lm RALT 9016



### PRODUCT DESCRIPTION

**APPLICATION:** Offices, meeting rooms  
Shops, commercial areas.  
General-purpose areas, with no specific risks  
Suspended luminaire  
Ceiling surface-mounted luminaire.

**MATERIALS EXECUTION:** Lacquered and anodized aluminium profile body.  
Die-cast aluminum end-caps.  
White Textured/ RALT 9016  
Luminaire with  $\leq 19$  UGR (Unified Glare Ratio)  
LMO - Linear Micro Optics®. Coated linear micro optics with a reflector.

**MAINS SUPPLY AND WIRING:** Voltage and frequency supply of the luminaire (230V at 50Hz).  
Luminaire wired with electronic driver.

**ACCESSORIES:** FA 500 mm, FA 1000 mm, SIS 500 mm, SIS 1000 mm, FA 1500 mm, FA-AN 500 mm, SIS 1500 mm, SIS-AN 500 mm, FA-AN 1000 mm, FA-AN 1500 mm, SIS-AN 1000 mm, SIS-AN 1500 mm, FAC 500 mm, FAC 1000 mm, SISL-AN 500mm, SISL-AN 1000mm, FAC 1500 mm, FAC-AN 500 mm, SISL-AN 1500mm, FAC-AN 1000 mm, FAC-AN 1500 mm.

**OPTIONS:** Luminaire wired with electronic driver for dimming.

### TECHNICAL DATA

	Luminous Flux (Lm)	System Power (W)	Luminous Efficacy (lm/W)	LED Risk Group	Colour Temp. (K)	UGR		Dimensions (mm)				
						(X= 4H; Y= 8H; S= 0,25H)		Length	Width	Height	Fixation	Suspension
						Tran.	Long.					
PPL-MFI 02 09014-5D DE 2181lm	1839	14.36	128	0	4000	17,9	20,5	872	70	75	n/a	741


### OTHER TECHNICAL INFORMATION

CRI: > 80


Photometric Code: 840/xxx

Lifetime Factor (L80B10) @ Ta=25°C: 50.000 h

### POLAR DIAGRAM



### ENERGY LABEL

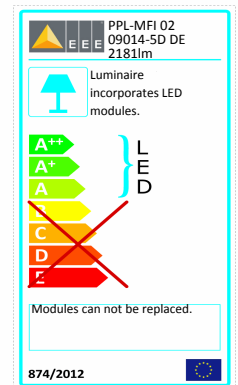

### NORMS

EN 60598-1, EN 55015, EN 61000-3-2, EN 61547, 2014/30/EU, 2014/35/EU, 2011/65/EU (Rohs), (EU) N° 1194/2012 (Ecodesign)